
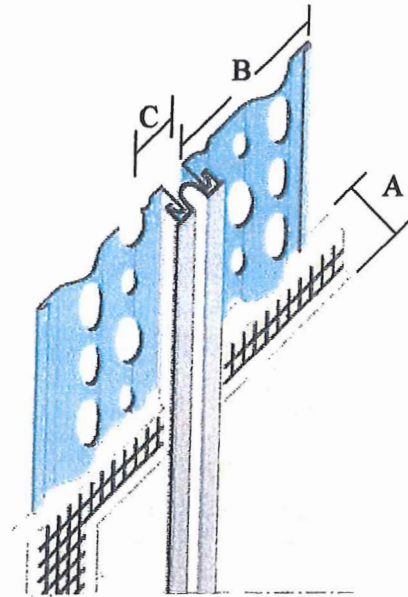


WEMICO

PRODUCT DATA

PERFORATED EXPANSION JOINT/MOVEMENT JOINTS

(Iss.1/0606)

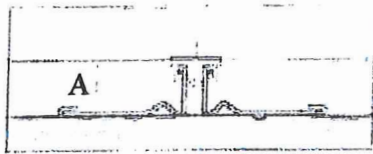

NOT TO BE USED HORIZONTALLY

RENDER THICKNESS DIM A +/- 0.5mm	DIM B +/- 10mm	DIM C +/- 2mm	LENGTH +/- 10mm	POLYESTER POWDER COATED GALV STEEL WE79/79	POLYESTER POWDER COATED ALUMINIUM WE79/79AL	STAINLESS STEEL WE79/79SS	STRIP +/- 0.127	GAUGE +/- .05mm
6mm	32mm	12mm	3m galv/ss 2.5m ali	WE80/80	WE80/80AL	WE80/80SS	44.45	0.45
10mm	35mm	12mm	3m galv/ss 2.5m ali	WE81/81	WE81/81AL	WE81/81SS	50.8	0.45
13mm	35mm	12mm	3m galv/ss 2.5m ali	WE806/806	WE806/806AL	WE806/806SS	56.8	0.45
16mm	35mm	12mm	3m galv/ss 2.5m ali	WE82/82	WE82/82AL	WE82/82SS	56.8	0.45

PVC JOINT AVAILABLE IN WHITE, BROWN AND OATMEAL

GALVANISED STEEL(POLYESTER POWDER COATED)

GRADE OF MATERIAL: Z275 (275 GRAMS GALVANISATION PER M2)
BRITISH STANDARD: BS EN 10143:1993
ADDITIONAL COATING: POLYESTER POWDER
COLOUR: WHITE RAL 9010
COATING THICKNESS: 30 MICRONS MINIMUM ON SEEN FACE

STAINLESS STEEL

GRADE OF MATERIAL: 304 2B
BS NUMBER: BS EN10088-2:2005

ALUMINIUM

GRADE OF MATERIAL: 1050 H14
BS NUMBER: EN485/4:1994

OPTIONAL PVC NOSING

GRADE OF MATERIAL: EXTERIOR GRADE RIGID PVC
COLOUR OF NOSE: WHITE (N) BROWN(BRN) OATMEAL(OAT)