



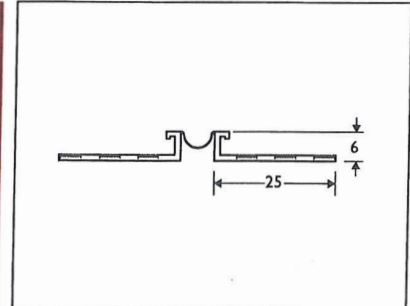

PRODUCT DATA SHEET - M6

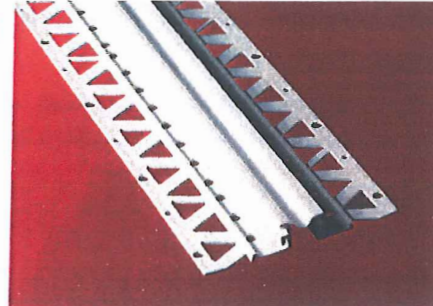

Affiliations FPDC

Health & Safety Delsys PVCu beads are safe to handle. COSHH certificate available upon request.

Application For use where minor movement/expansion in the render is expected. Can also be used where changes in render colour are specified.

Chemical General purpose, Calcium/Zinc stabilised medium impact rigid PVCu compound.

Product M6

Description 6mm Movement Bead

Brand Delsys

Composition Made from PVCu

Dimensions Approx 13mm exposed width with 25mm wing each side.

Quality Control Manufactured in accordance to ISO 9001 & complies with BS EN 13914-1&2

Depth 6 - 8mm plaster depth

Colours White & Ivory (IV)

Weight/box 4.63 kgs

Length 2.5m

Packaging 25 lengths per tube

Light UV stable

Installation Choose your beads to suit their application (internal/external) and the plaster/render thickness to be used. Cut to length with tin snips or a fine tooth saw. Fixing is quick and simple. Apply dabs at 600mm centres then press the perforated wings into the plaster dabs.

Storage Store flat away from heat and direct sunlight.

Supply Available Ex-stock. Typical delivery within 48 hrs. Please contact our sales team for further information.



PROTEKTOR UK Limited

Protektor House, Frederick Road
Hoo Farm Industrial Estate
Kidderminster DY11 7RA

Tel: 01562 515200
Fax: 01562 515116
Email: info@protektor.co.uk
Web: www.protektor.co.uk